



Pojistky MIDI, MEGA a ANL a držiaky poistiek


www.victronenergy.com

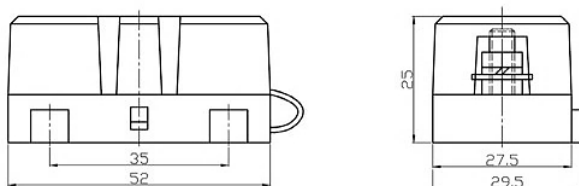


Držiak poistky pre poistky MIDI





MIDI fuse

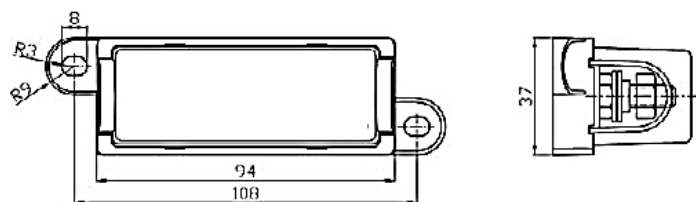


Držiak poistky pre MEGAfuse

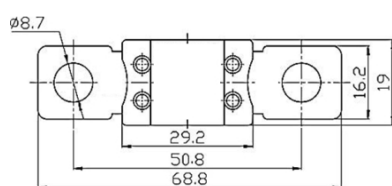

Poistka MEGA

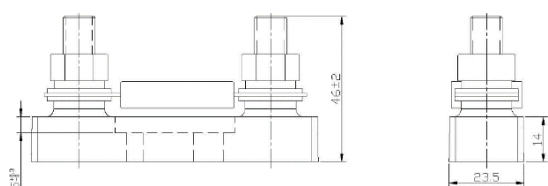

Držiak poistky pre poistku ANL

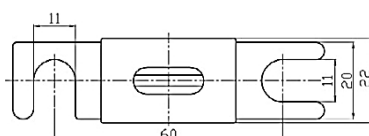

Pojistky MIDI 32 V	Približný pokles napätia	Odolnosť voči chladu
MIDI poistka 60 A/32 V	70 mV	0,9 mΩ
MIDI poistka 80 A/32 V	60 mV	0,55 mΩ
MIDI fuse 100 A/32 V	60 mV	0,45 mΩ
MIDI fuse 125 A/32 V	60 mV	0,30 mΩ
MIDI fuse 150 A/32 V	80 mV	0,30 mΩ
MIDI-poistka 200 A/32 V	80 mV	0,25 mΩ
MIDI poistky 58 V	Približný pokles napätia	Odolnosť voči chladu
MIDI poistka 30 A/58 V	65 mV	2 mΩ
MIDI poistka 40 A/58 V	65 mV	1,4 mΩ
MIDI fuse 50 A/58 V	65 mV	1 mΩ
MIDI fuse 60 A/58 V	70 mV	0,9 mΩ
MIDI fuse 80 A/58 V	70 mV	0,42 mΩ
MIDI fuse 100 A/58 V	70 mV	0,45 mΩ

MEGafuses 32 V	Približný pokles napätia	Odolnosť voči chladu
MEGafuse 60 A/32 V	120 mV	1,5 mΩ
MEGafuse 80 A/32 V	90 mV	0,7 mΩ
MEGafuse 100 A/32 V	90 mV	0,6 mΩ
MEGafuse 125 A/32 V	90 mV	0,4 mΩ
MEGafuse 150 A/32 V	90 mV	0,38 mΩ
MEGafuse 175 A/32 V	90 mV	0,3 mΩ
MEGafuse 200 A/32 V	80 mV	0,25 mΩ
MEGafuse 225 A/32 V	80 mV	0,22 mΩ
MEGafuse 250 A/32 V	80 mV	0,2 mΩ
MEGafuse 300 A/32 V	80 mV	0,17 mΩ
MEGafuse 400 A/32 V	70 mV	0,13 mΩ
MEGafuse 500 A/32 V	70 mV	0,1 mΩ

MEGafuses 58 V	Približný pokles napätia	Odolnosť voči chladu
MEGafuse 125 A/58 V	90 mV	0,4 mΩ
MEGafuse 200 A/58 V	80 mV	0,25 mΩ
MEGafuse 250 A/58 V	80 mV	0,2 mΩ
MEGafuse 300 A/58 V	80 mV	0,17 mΩ

MEGafuses 80 V	Približný pokles napätia	Odolnosť voči chladu
MEGafuse 40 A/80 V	135 mV	1 459 mΩ
MEGafuse 60 A/80 V	135 mV	1 017 mΩ
MEGafuse 80 A/80 V	110 mV	0,716 mΩ
MEGafuse 100 A/80 V	110 mV	0,868 mΩ
MEGafuse 125 A/80 V	110 mV	0,653 mΩ
MEGafuse 150 A/80 V	110 mV	0,332 mΩ
MEGafuse 175 A/80 V	110 mV	0,282 mΩ
MEGafuse 200 A/80 V	110 mV	0,253 mΩ
MEGafuse 225 A/80 V	110 mV	0,235 mΩ
MEGafuse 250 A/80 V	110 mV	0,208 mΩ
MEGafuse 300 A/80 V	80 mV	0,171 mΩ
MEGafuse 400 A/80 V	80 mV	0,128 mΩ
MEGafuse 500 A/80 V	80 mV	0,106 mΩ

Poistka ANL

Victron Energy B.V. | De Paal 35 | 1351 JG Almere | Holandsko E-mail: sales@victronenergy.com
www.victronenergy.com

Poistky ANL 80 V	Približný pokles napätia	Odolnosť voči chladu
ANL poistka 300 A/80 V	125 mV	0,18 mΩ
Poistka ANL 400 A/80 V	125 mV	0,16 mΩ
Poistka ANL 500 A/80 V	100 mV	0,25 mΩ