


PROFESSIONAL NET ACCESSORIES

FLOOR-STANDING DISTRIBUTION PANELS

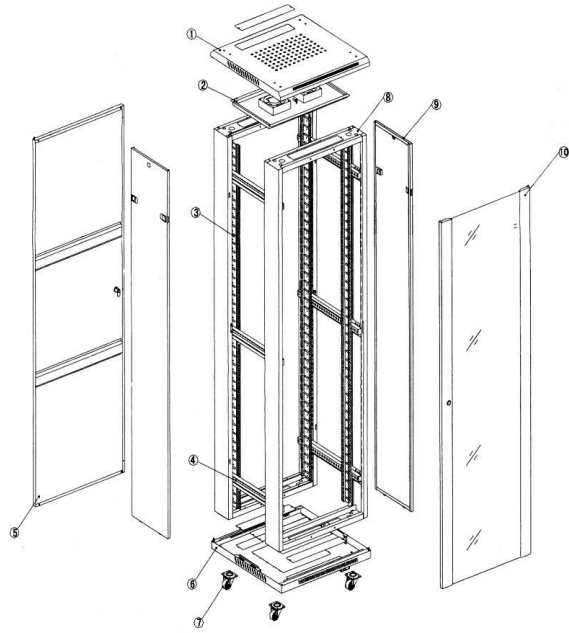

P/N	Capacity	Width (mm)	Depth (mm)	Height (mm)	Shipping Weight (kg)	Volume when unfolded (m³)
LS22U-60/60	22U	600	600	1166	65	0.166
LS27U-60/60	27U	600	600	1388	70	0.25
LS32U-60/60	32U	600	600	1610	75	0.3
LS37U-60/60	37U	600	600	1833	90	0.266
LS42U-60/60	42U	600	600	2055	110	0.4
LS45U-60/60	45U	600	600	2166	115	0.433
LS27U-60/80	27U	600	800	1388	80	0.25
LS37U-60/80	37U	600	800	1833	95	0.32
LS42U-60/80	42U	600	800	2055	115	0.4
LS45U-60/80	45U	600	800	2166	120	0.53
LS42U-80/80	42U	800	800	2055	117	0.45
LS45U-80/80	45U	800	800	2166	128	0.53
LS42U-80/100	42U	800	1000	2055	127	0.45
LS45U-80/100	45U	800	1000	2166	133	0.53

- **STANDARDS:** ANSI/EIA RS-310-D, IEC 297-2, DIN 41494 – Part 1, Part 7, GB/T 3047, 2-92STANDARD
- **MATERIAL:** cold-rolled steel, laminated tempered safety glass
- **THICKNESS:** structural components 2.0 mm, other parts 1.2 mm
- **FINISH:** RAL 7035 baked powder coating, anti-corrosion treatment, IP20 protection rating
- **LOAD CAPACITY:** 600 kg
- **STANDARD EQUIPMENT:** locks on all doors, digital thermostat, fans (2 for 600 mm depth, 4 for 800 mm depth, and 6 for 1000 mm depth), casters (feet also included in the package), mounting kits

The cabinets are shipped unassembled as standard; assembly is possible.